



ST 1048


Single End Roving Designed for Silentex® Noise Control Solutions

INNOVATIVE SOLUTIONS

The Silentex® noise control solution is a unique system that enables improved durability and acoustic performance while significantly reducing overall system cost.

PRODUCT SOLUTIONS

Advantex® continuous roving is an integral part of the Silentex® system and is designed for high thermal and corrosion resistance. The Advantex® glass composition represents a technological advance in OCV™ Reinforcements' commitment to provide value-added products to our customers. The Silentex® process, combined with Advantex® continuous roving, offers a robust solution to meet demanding acoustic requirements, increasing engine temperatures, reduced weight and volume, reduced back pressure, and lower overall cost of silencers.

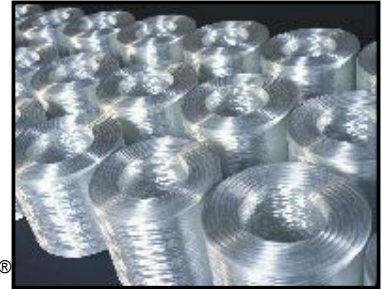

© JLSponge

PRODUCT DESCRIPTION

The ST1048 product is OCV™ Reinforcements' 28µm 4800 tex Single End roving based on the Advantex® high temperature composition and is specifically engineered for use in the Silentex® process to minimize process interruptions and ensure overall efficiency.

High density 25kg doffs of ST1048 roving are spliced together in a very precise manner to ensure package transfer that is transparent to the Silentex® process. ST1048 is designed to ensure that the strand consistently texturizes into **2,900 filaments** to ensure that each muffler will be filled with continuous fibers, highly effective in attenuating sound and highly resistant to blowout.



FEATURES AND PRODUCTS BENEFITS

<ul style="list-style-type: none"> Annealing and softening point are over 65°C (117°F) higher than standard E glass 	<ul style="list-style-type: none"> Able to withstand increasing exhaust temperatures Stainless steel wool is not typically required to protect the fiber from the exhaust gas
<ul style="list-style-type: none"> 5 times the fiber strength of basalt wool and over 2 times the fiber strength of E glass needle felts 	<ul style="list-style-type: none"> Fibers will remain continuous and resist blowout in the exhaust
<ul style="list-style-type: none"> Nearly 3 times more resistant to degradation due to corrosive fluids found in typical exhausts than standard E glass 	<ul style="list-style-type: none"> Fiber strength will be retained even under the most corrosive conditions in the exhaust
<ul style="list-style-type: none"> Linear density of 4800 tex 	<ul style="list-style-type: none"> Very high process efficiency Typical direct fill rates as fast as 36g/s/nozzle
<ul style="list-style-type: none"> Narrow and consistent fiber diameter distribution Does not contain unfiberized beads like most basalt wool 	<ul style="list-style-type: none"> Consistent acoustic absorption Fibers not respirable into the deep lung Fill density can often be reduced over basalt preforms or needle felt
<ul style="list-style-type: none"> Good processability in the Silentex machines 	<ul style="list-style-type: none"> Maintains high production efficiency Good strand texturization
<ul style="list-style-type: none"> 18 x 40kg doffs with only 17 splices per pallet 	<ul style="list-style-type: none"> Individual doffs are spliced together No need to handle individual doffs
<ul style="list-style-type: none"> Extremely high package density at 700kg per pallet 	<ul style="list-style-type: none"> Reduces floor space compared to ready texturized products

ST 1048

Single End Roving Designed for Silentex[®] Noise Control Solutions

MECHANICAL PROPERTIES

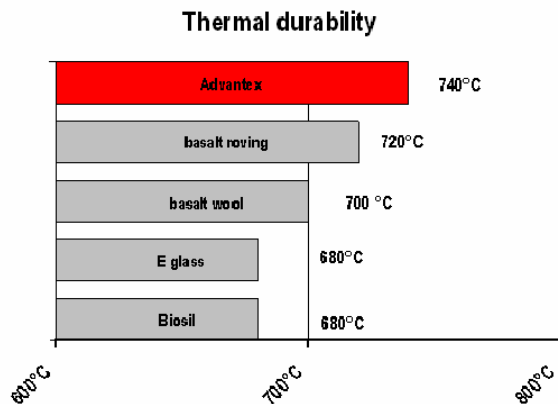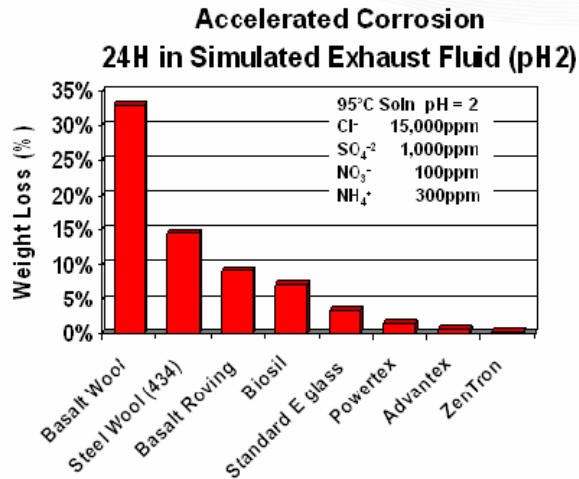

PACKAGING

Rovings are available in a single-end internal-pull package. Each pallet weighed about 700kg. Pallets are stretch wrapped for load stability. All doffs are wrapped with Tack-Pak[®] or shrinkable film for protection during transport. Full doffs are available in 25 kg (55 lb.) weight and they can be packaged in bulk or Creel-Pak[®] format. More information is available in the Customer Acceptance Standards

STORAGE

Unless otherwise specified, it is recommended to store glass fiber products in a cool, dry area. The packaging is not waterproof. Be sure to protect the product from the weather and other sources of water. The glass fiber products must remain in their original packaging material until the point of usage. If these conditions are maintained, the glass fiber product should not undergo significant changes when stored for one year. Beyond one year after delivery, the product sizing, which impacts processing, may change if the doffs are stored outside the recommended conditions.

The best storage conditions are: temperatures between 20°C and 23°C and humidity between 60% and 65%.

The product should be stored in the workshop, within its original packaging, 48 hours prior to its utilization.



OWENS CORNING
COMPOSITE MATERIALS, LLC
ONE OWENS CORNING PARKWAY
TOLEDO, OHIO 43659
1.800.GET.PINK™
www.owenscorning.com
www.ocvreinforcements.com
Contact:
SingleEndRovings.ocvamericas@owenscorning.com

EUROPEAN OWENS CORNING
FIBERGLAS, SPRL.
166, CHAUSSÉE DE LA HULPE
B-1170 BRUSSELS
BELGIUM
+32 267 48211

Contact:
SingleEndRovings.ocvmea@owenscorning.com

OWENS CORNING - OCV ASIA PACIFIC
SHANGHAI REGIONAL HEADQUARTERS
2F OLIVE LVO MANSION 620 HUA SHAN ROAD
SHANGHAI 200040
CHINA
+86 262 489 922

Contact:
SingleEndRovings.ocvap@owenscorning.com

This information and data contained herein is offered solely as a guide in the selection of a reinforcement. The information contained in this publication is based on actual laboratory data and field test experience. We believe this information to be reliable, but do not guarantee its applicability to the user's process or assume any responsibility or liability arising out of its use or performance. The user agrees to be responsible for thoroughly testing any application to determine its suitability before committing to production. It is important for the user to determine the properties of its own commercial compounds when using this or any other reinforcement. Because of numerous factors affecting results, we make no warranty of any kind, express or implied, including those of merchantability and fitness for a particular purpose. Statements in this publication shall not be construed as representations or warranties or as inducements to infringe any patent or violate any law safety code or insurance regulation.

Pub. No. 10010855. Owens Corning reserves the right to modify this document without prior notice. ©2009 Owens Corning

SingleEndRovings_ST1048_ww_03-2009_Rev0